


https://www.wiremeshfence.com/buy-Pedestrian_Barriers.html

FEATURES & BENEFITS

Colorful for Outdoors

Hot dipped or powder coating surface supplies corrosion resistance and various colors for different use.



Flexible Structure

Combine as many as crowd control barriers you want for your use without any difficult.



Customization Service

Reflective sheets, shade cloth, billboard or signage can be customized for your choice.




Pedestrian & Vehicle Gate

Pedestrian or vehicle gates can be supplied according to your sizes. to your sizes.



Flexible Feet Choice

Fixed or removable feet for choice.
Bridge, flat or wheel removable feet options.

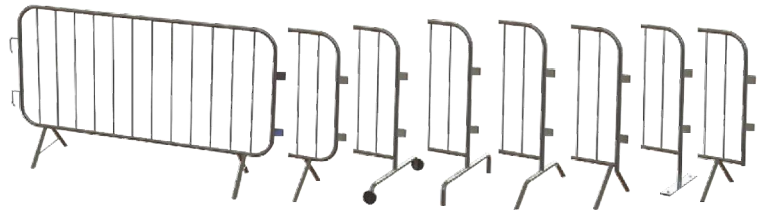

TECHNICAL DETAILS



Length: 2 m.

Height: 1.1 m.


Main frame: 32 mm OD × 1.5 mm thickness.

Grill: 14 uprights of 16 mm OD × 1.2 mm thickness.

Upright spacing: 106.9 mm.

Feet: flat/bridge/fixed.

TECHNICAL DETAILS

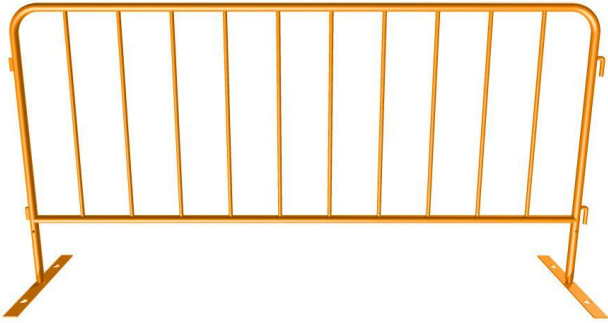

Length: 2.2 m.


Height: 1.1 m.

Main frame: 25 mm OD × 1.5 mm thickness.

Grill: 10 uprights of 16 mm OD × 1.2 mm thickness.

Upright spacing: 200 mm.

Feet: flat/bridge/fixed.

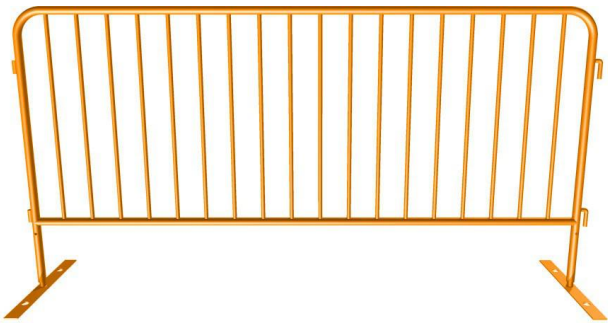

Length: 2.2 m.


Height: 1.1 m.

Main frame: 32 mm OD × 1.5 mm thickness.

Grill: 18 uprights of 16 mm OD × 1.2 mm thickness.

Upright spacing: 110 mm.

Feet: flat/bridge/fixed.

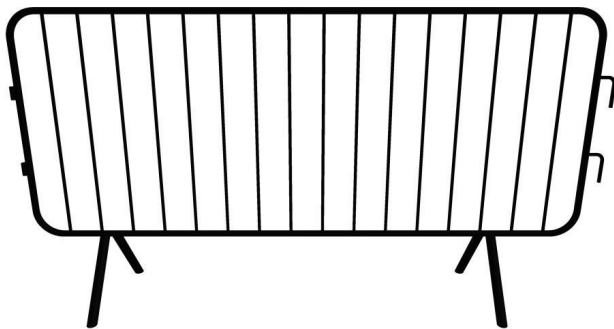

Length: 3.2 m.


Height: 1.1 m.

Main frame: 38 mm OD × 1.5 mm thickness.

Grill: 16 uprights of 16 mm OD × 1.2 mm thickness.

Upright spacing: 127 mm.

Feet: flat/bridge/fixed.

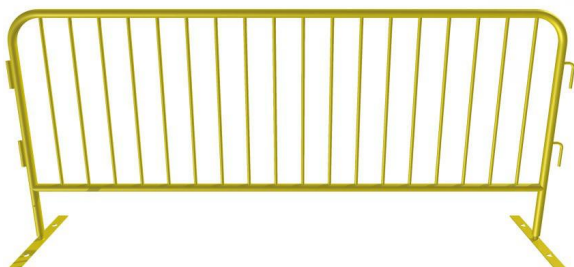

Length: 2.5 m.

Height: 1.1 m.


Main frame: 32 mm OD × 1.5 mm thickness.

Grill: 18 uprights of 16 mm OD × 1.2 mm thickness.

Upright spacing: 140 mm.

Feet: flat/bridge/fixed.

CROWD CONTROL BARRIER – AU & NZ

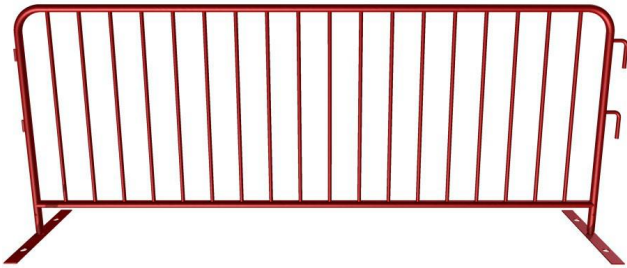

Length: 2.6 m.


Height: 1.1 m.

Main frame: 38 mm OD × 2 mm thickness.

Grill: 18 uprights of 16 mm OD × 1.2 mm thickness.

Upright spacing: 129 mm.

Feet: flat/bridge/fixd.

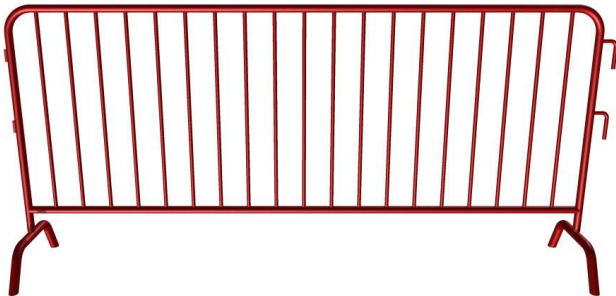

Length: 2.6 m.

Height: 1.1 m.

Main frame: 38 mm OD × 2 mm thickness.

Grill: 19 uprights of 16 mm OD × 1.2 mm thickness.

Upright spacing: 121 mm.

Feet: flat/bridge/fixd.

